

GROUNDING CLAMPS

series
PTA 10

Protection	Gas	Zone	1-2	II2G	Ex db IIC T6÷T5 Gb
	Dusts		21-22	II2D	Ex tb IIIC T85°C÷T100°C Db

Degree of Protection
IP66/67

Amb. Temp.	Standard	-20°C	+40°C
	Extended	-50°C	+80°C



Material
Sleeve in Polyamide.
Anchor hook in Stainless Steel
AISI 304.
Contact Spring in Brass.

Standards and Certificates

Directive 2014/34/EU (ATEX)

EN 60079-0 • EN 60079-1
EN 60079-31

CE BVI 14 ATEX 0011

IEC 60079-0 • IEC 60079-1
IEC 60079-31


IECEx EPS 14.0030X

- Indispensable whenever it is required the temporary grounding of tank trucks or tankers during transfer either of liquids or hazardous substances.
- The fastening is secured by two brass springs of great strength.

Options

- Stainless steel AISI 316L cable gland.

- Cable gland with female bushing 1/2" NPT (N).

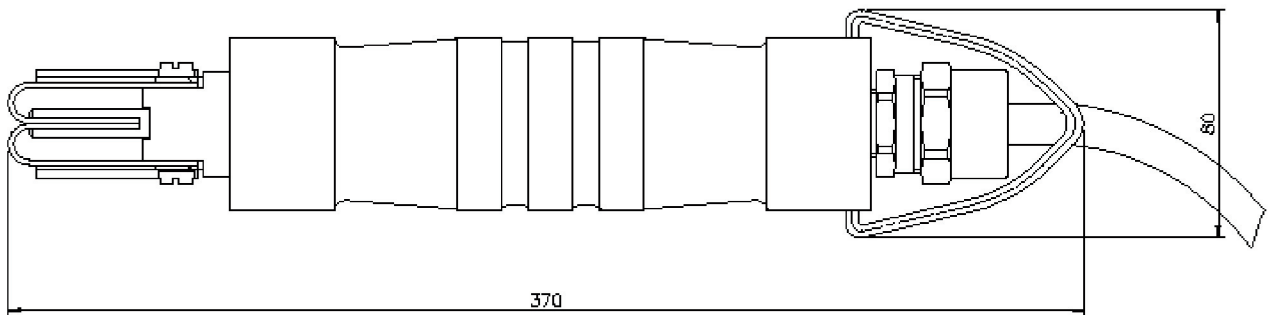

Insulation Voltage	Gripping capacity	Max Current	Cable Section	Weight (kg)
3000 V	0.5 mm ÷ 3 mm	10 A	6 - 10 - 16 mm ²	1

NOTES

To read the installation and maintenance instructions is recommended.

The temperature class T6/T85°C takes into account an extended Ambient Temperature (A.T.) from -50°C to +60°C; whereas the temperature class T5/T100°C of an extended A.T. from -50°C to +80°C.